
DOCK SEALS AND SHELTER INFORMATION

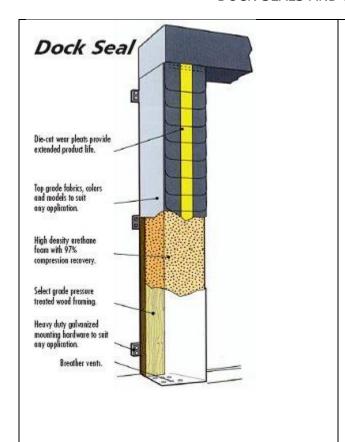

GENERAL OVERVIEW

- **FP** Provides a superior seal economical.
- Utilized in high traffic areas rugged construction.
- High density polyurethane foam, pressure treated wood frame.
- Cover material and wear pleats top quality, high tear and abrasion resistant fabrics.

Dock seals to consist of **3 foam pads** bonded to treated lumber.

BASE FABRIC: •VINYL •HYPALON

•MAX 60

FACE FABRIC (Multiple Layers):

•VINYL •HYPALON •MAX 60

SIDE PAD WEAR: •WP4 (4" exp.)

•WP8 (8" exp.) •WP16 (16" exp.)

•WF (Wear Face)


HEAD PAD WEAR: •WP4 •WP8

•WP16 •WF

Dock seal colors:


_____base, _____face.

Fabric weights and colors as selected from manufacturer's standards.

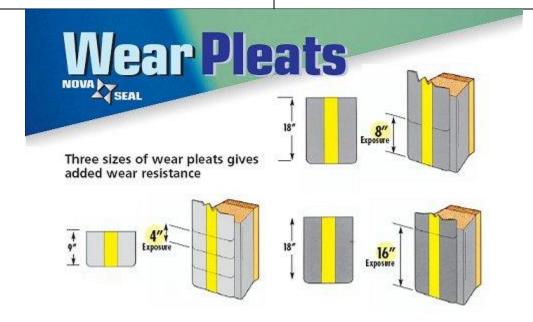



IF AN inclining or declining ramp is a problem, NOVA SEAL offers a solution. Sides of foam seal can be tapered to match the angle of the ramp.



WHERE foam seals cannot be mounted inside doorways, or door frames are too wide or high, beveled foam sides and head pad can be used to seal the gap.







