



816 in Trinar® white





816 in Trinar® white with large TL lites



816 in sandstone

COMMERCIAL 800 SERIES

3" Thick R-25.8

814 / 816 / 832 / 833 / 832-20 /
833-20 / 850 / 851

////////////////////

The Architects' Choice For the Most Demanding Specifications

The outstanding features and benefits of the Haas 800 Series have made it the door of choice among commercial and industrial architects. The 800 series commercial insulated steel doors feature a full 3" pressure-injected core of high-density CFC-free polyurethane foam insulation, with a calculated R-Value of 25.8 – the highest in the commercial door industry. The 800 series is exceptionally strong and reinforced with roll-formed galvanized steel struts and double-end hinges as required to meet or exceed local wind load specifications. It is the ideal door for locations that require both maximum energy efficiency and durable strength.






833 in white




816 in white


DOOR PANELS




814 Flush Woodgrain
All Colors
Window Options: p 31 (bottom)




816 V-Groove Woodgrain
All Colors
Window Options: p 31 (bottom)




832, 832-20 Flush Smooth
Polar White and Brown
Window Options: p 31 (bottom)



833, 833-20 V-Groove Smooth
Polar White and Brown
Window Options: p 31 (bottom)



850 V-Groove Stucco Aluminum
Polar White
Window Options: p 31 (bottom)



851 Flush Stucco Aluminum
Polar White
Window Options: p 31 (bottom)

OPTIONS


800 Series Available Options

- 2" or 3" Track
- Double Steel End Stiles
- Exhaust Port
- Cam Safety Device
- Spring Bumpers
- Chain Hoist
- High Cycle Springs
- Wind Load Rating
- Glazing (lites)
- High Cycle Rollers

Optional Exhaust Port (interior view)



A Full Thermal Break is used in the tongue-and-groove construction of all 800 series doors. This rigid vinyl extrusion seals the joints and eliminates metal-to-metal contact, which limits the transfer of temperature.

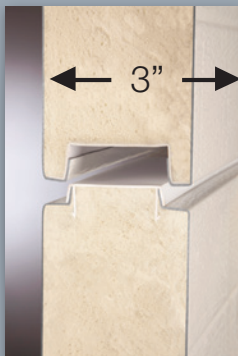

800 Series / 3" thick / R-25.8

800 QUICK GUIDE

Model	Door Thickness	R-Value*	Max. Door Size		End Stile Type	Section Skins	
			Width	Height		Inside	Outside
814	3" (76.2mm)	25.8	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA Flush Woodgrain Steel
816	3" (76.2mm)	25.8	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	26 GA V-Groove Woodgrain Steel
832	3" (76.2mm)	25.8	24'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA Smooth Steel
833	3" (76.2mm)	25.8	38'-2"	32'-0"	Steel	26 GA V-Groove Woodgrain Steel	20 GA V-Groove Smooth Steel
832-20	3" (76.2mm)	25.8	24'-2"	32'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA Smooth Steel
833-20	3" (76.2mm)	25.8	38'-2"	32'-0"	Steel	20 GA V-Groove Smooth Steel	20 GA V-Groove Smooth Steel
850	3" (76.2mm)	25.8	38'-2"	32'-0"	Steel	24 GA V-Groove Stucco Aluminum	24 GA V-Groove Stucco Aluminum
851	3" (76.2mm)	25.8	38'-2"	32'-0"	Steel	24 GA V-Groove Stucco Aluminum	24 GA Flush Stucco Aluminum

*calculated R-Value